

Introducing:



SMART FLEX

Braided Sleeving Products for Wire and Cable Management


Nominal sizes: 1/4", 1/2", 3/4" and 1 1/2"

CLEAN CUT

Scissor Cut for Easy, Fray Resistant Installation in Production or Field



- Resists Fraying when Cut with Scissors
- Increased Braid Density for Fuller Coverage
- High Abrasion Resistance
- Temperature Range: -94° to 257°F
- Melt Temp: 482°F

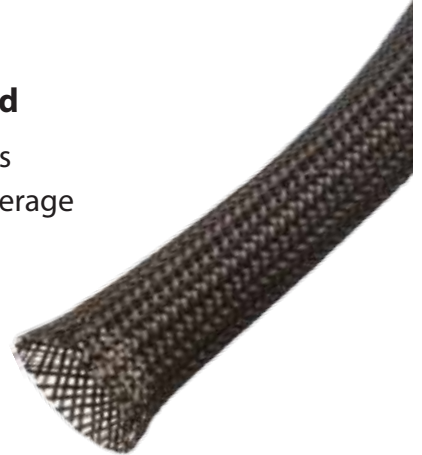

SPLIT BRAID F6

Flexible, Wrappable Split Braided Tube



- Easy, Cost Effective Installation
- Halogen Free
- 25% Edge Overlap
- Cut & Abrasion Resistant
- More Flexible than Split Convolute or Spiral Wrap
- Melt Temperature: 482°F
- Retains Shape & Rigidity Throughout -94° to 257°F Temp. Range



FLEXO MOUNTING SYSTEM

The Ultimate Termination Solution for Flexo Sleeving



- Easily Add & Rework Wire Bundles
- Provides High Strength Strain Relief
- Easy to Install

